

尺寸图 DIMENSIONS




FPD270B3

延时组合冲洗电磁阀

Delay combined
flushing solenoid valve

性能参数 FUNCTION PARAMETERS

| | |
|---------------------|--------------------|
| 额定电压 Rated Voltage | DC12V 24V 36V |
| 适用水压 Pressure Range | 0.02~0.8MPa |
| 使用寿命 Operate Life | ≥ 100000 次 OPS |
| 安装间距 Spacing | 25 × 25mm 或 42.3mm |
| 进水口 Inlet | Φ6.35mm |
| 出水口 Outlet | Φ6.35mm |

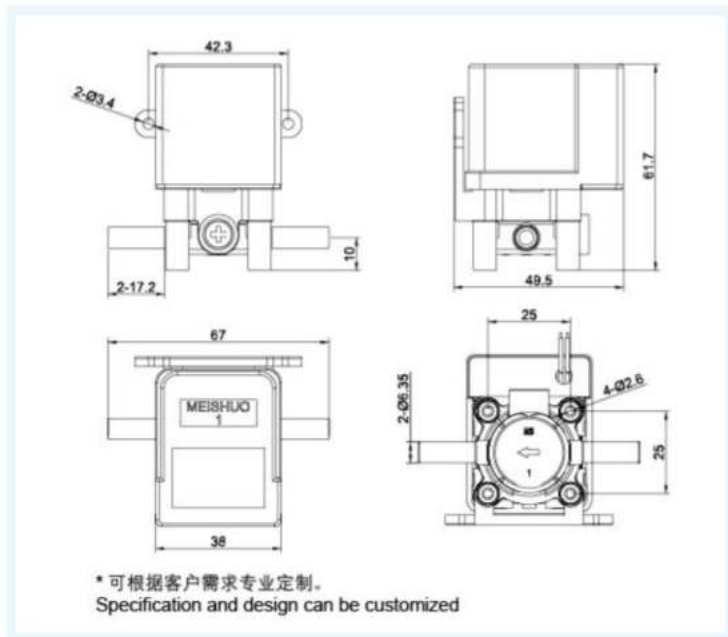

流量特性 FLOW CHARACTERISTIC

| | |
|----------------------|--|
| 流量 Flow Rate | 0.3MPa, > 3L/min |
| 废水流量 Waste Flow Rate | 0.42/0.5MPa, 300/450/800/1000/1500 mL/min |